


VisioAlert

The VisioAlert is an small application ready Sigfox enabled transceiver. A smart sensor perfectly suited for panic, alert and position monitoring applications.

The VisioAlert provides connection to national and global network infrastructure for reliable and secure communications. This standalone small form factor sensor device delivers real time position, panic and alert data for many use cases and can be configured accordingly. An integrated button or automated Alert detection can be used as a trigger. The configuration of the transceiver can be done via the product or network allowing for real-time functionality flexibility.

Powered through a Li-SOCL battery, it allows standard autonomy for more than 2 years. Longer support options are available.

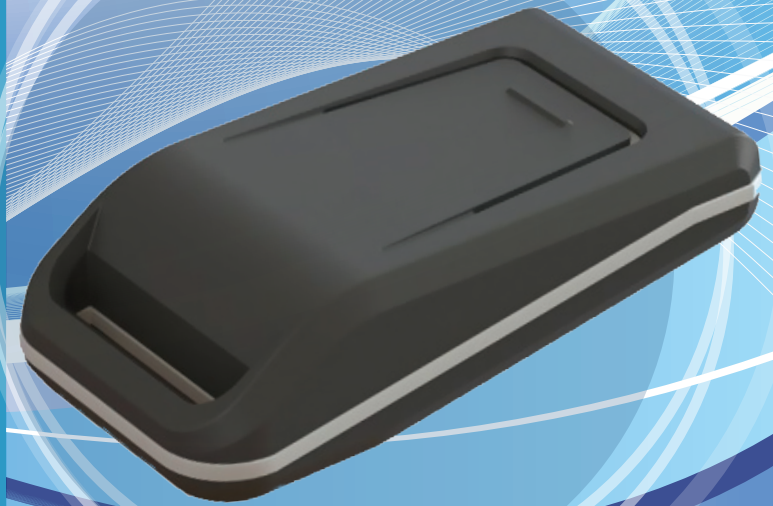

HIGHLIGHTS

- Alert detection data through Sigfox compliant radio networks perfect for Security, Medical and Position monitoring applications
- Wifi Tracking Support
- Indoor & out Tracking
- Full GPS Support
- Multiple LED device feedback
- Rugged Sealed enclosure with Integrated Button
- Fully Internal battery powered
- Long range connectivity

PERFORMANCES

SF RF power: 14dBm (25mW)

SF RF sensitivity: up to -127dBm

GPS Sensitivity Tracking: -158 dBm

GPS Sensitivity Navigation: -157 dBm

WARNINGS

- Battery end of life
- Over Temperature
- Fall/Crash Detection

FIRMWARE

SIGFOX network protocol

Transmission cycles: 2, 50, 100 or 140 update links per day

Data encryption: AES128 (Optional)

SOFTWARE & DATA MANAGEMENT

Device data transmitted via the Sigfox cloud infrastructure to the back-end server platform for processing and reporting is provided as a standard. A custom platform with built-in device support can be provided or easily integrate the device into your own platform.

PERIPHERALS

Accelerometer

Temperature Sensor

REFERENCES

VisioAlert Hardware Manual

WHO CAN BENEFIT

Children, Senior Citizens, Shift Workers, Emergency Service Workers, People with Special needs

GENERAL INFORMATION

Operating temperature:

-20 °C / +65 °C

Mounting Options: Can be used as a keyholder, fitted on bags, Lanyards etc.

Dimensions: 70 x 38 x 19 mm

Weight: 40 grams

Housing: Sealed

Antennas: All Integrated (Internal)

GPS LNA: On-board

Automatic Alert:

Fall or Crash detection

Standards: ICASA, EN 300-220, EN 301-489, EN 60950; CE

Support: The device is available for RCZ1 (Europe and Middle East)



Visiosoft (Pty) Ltd

Palata Building, Unit 5
Ground Flr, 29 Bella Rosa St
Rosenpark Village, Bellville, 7530

Tel: +27 (0)21 492 3262

Email: info@visiosoft.co.za

www.visiosoft.co.za



visiosoft